



SCUBAPRO

G2

QUICK USE GUIDE



BUTTONS

Press

The act of pressing and releasing one of the buttons.

Press-and-Hold

The act of pressing and holding one of the buttons for 1 second before release.

TURN ON: Press-and-hold the right button.

GO BACK: Press-and-hold the right button.

RETURN HOME: Press-and-hold right & left buttons simultaneously.

Surface Functions

Dive Functions

Button functions at the **SURFACE** in **SCUBA** and **GAUGE** modes

	LEFT BUTTON (Menu)	MIDDLE BUTTON (Log)	RIGHT BUTTON (Light/Dim)
Press	Main menu	Logbook	Backlight
Press-and-Hold	Oxygen setting	Gas summary table	Compass

Button functions while **DIVING** in **SCUBA** mode

	LEFT BUTTON (Book)	MIDDLE BUTTON (More)	RIGHT BUTTON (Light/Dim)
Press	Bookmark + stopwatch reset	Alternate window in sequence	Backlight
Press-and-Hold	Start manual gas switch	Alternate display in sequence; Compartment saturation; Dive profile/pictures	Compass

Button functions while **DIVING** in **COMPASS** mode

	LEFT BUTTON	MIDDLE BUTTON (Set)	RIGHT BUTTON (Exit)
Press	Set bookmark and reset stopwatch	Set bearing	
Press-and-Hold		Erase set bearing	Exit compass mode


Main Menu

Navigate through the **Main Menu** with the three easy-push buttons

LEFT BUTTON
(Scroll Down)

MIDDLE BUTTON
(Scroll Up)

RIGHT BUTTON
(Enter Your Selection)

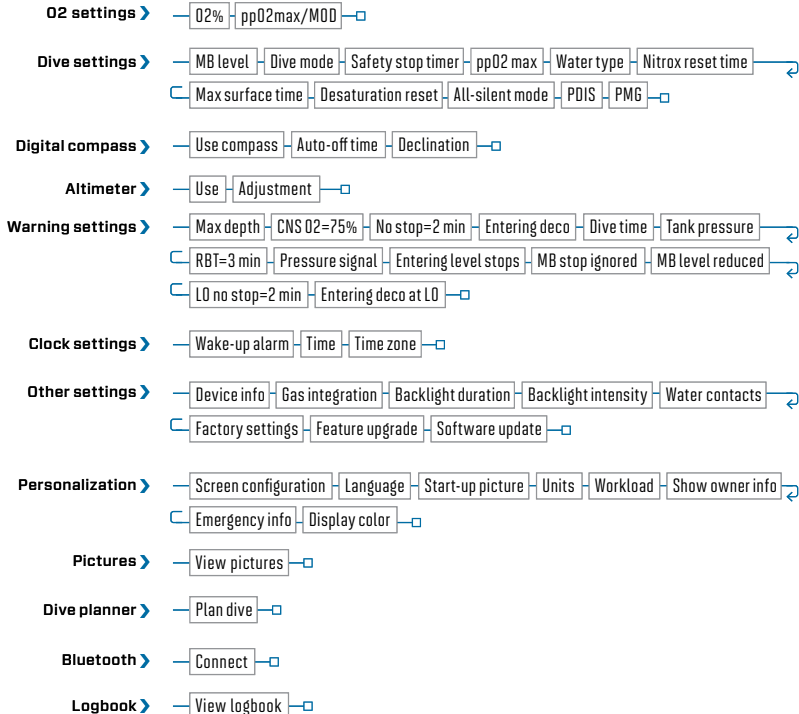


SELECT FROM FOUR DIVE SCREEN OPTIONS — Light, Classic, Full, Graphical


(Go to Personalization > Screen configuration)

You can also rotate the screen to have the buttons positioned at the bottom of the screen.


LIGHT SCREENS IN FOUR DIFFERENT COLOR OPTIONS




CLASSIC



FULL



GRAPHICAL



CHECK YOUR BATTERY

- Your G2 is powered by a rechargeable Li-Ion battery.
- Always check the battery capacity before each dive.
- If the battery warning appears, charge the battery.

WARNING!

When your G2's battery reaches the end of its lifetime, it can only be replaced by an authorized SCUBAPRO service center.

Do not open your G2 or try to replace the battery yourself!

Opening the G2 housing or the metal cap on the side of the G2 will VOID YOUR WARRANTY.

Changing the battery must be done with particular care in order to prevent water from seeping in.

The G2's warranty does not cover damages due to the improper placement of the battery, or the incorrect closing of the battery cap.

PAIRING YOUR TRANSMITTER

METHOD 1 AUTOMATIC

- Mount 1ST stage with transmitter attached on a full tank.
- Turn on your G2, make sure it is displaying the Time-of-Day screen, then place it near the transmitter (as shown on right) and open the tank valve.



METHOD 2 MANUAL

- Mount 1ST stage with transmitter attached on a full tank.
- Turn on your G2.
- From the Time-of-Day display, press left button to get to **Main Menu**.
- Scroll to **Other Settings**.
- Press right button to ENTER.
- From Other Settings menu, scroll down **Gas Integration**.
- Press right button to ENTER.
- From Gas Integration menu, scroll to **Pairing**.
- Press the right button to ENTER.
- Open the tank valve, and you are ready to pair.

- Using either method, once pressurized the transmitter will send a pairing sequence to your G2.
- When it receives this information, the display will show a list of tank designations.
- Scroll to **Tank T1**. (Tank T1 is always the main tank you start your dive with.)
- Press right button to SAVE your selection.
- Your G2 will confirm pairing with message: PAIRING TO T1 SUCCESSFUL.
- At that point, tank pressure will appear on your G2 display, and you're ready.

HOW TO POSITION AND USE THE HEART RATE MONITOR

- Position your HR belt (as shown on right).
- Adjust the strap so that it is comfortable to wear but snug enough so that it stays in place.
- HR belt must be worn directly against the skin.
- Moisten the electrode areas if your skin is dry or when diving in a drysuit.
- The maximum operating depth for the HR belt is 197ft/60m.



TO ACTIVATE THE HEART RATE FUNCTION ON YOUR G2

- Time-of-Day screen to **Main Menu** – press Enter.
- Main Menu to **Personalization** – press Enter.
- Scroll to **Workload (WL)** – press Enter.
- Select **Heart Rate** - press right arrow to Save.
- Advance to **Max Heart Rate** – set MHR - press right arrow to Save.
- Advance to **Base Heart Rate** – set BHR - press right arrow to Save.
- Advance to **Skin Temp** – set to On - press right arrow to Save.
- Heart Rate & Skin Temperature functions are now activated.